


Standard type




NT2R-K4B

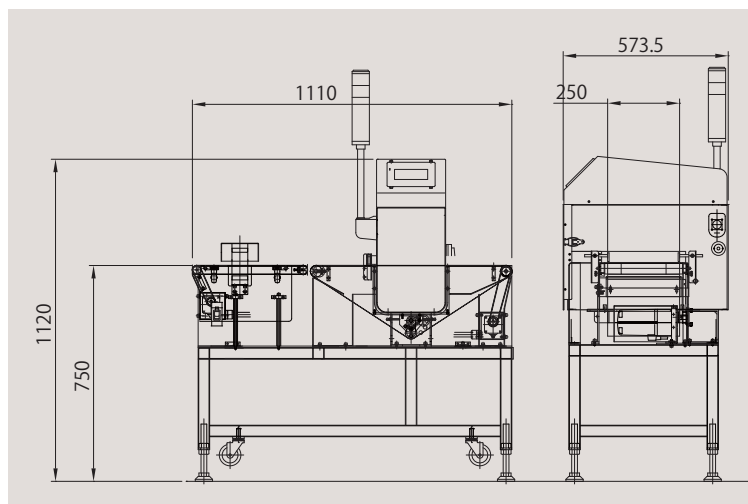

Model		NT2R-J6B	NT2R-K4B	NT2R-L2B
Belt width		150mm	250mm	350mm
Sensitivity	effective height:40mm	Fe 0.8mm dia. (Reference value: SUS wire 0.2mm dia X 2mm)		
	effective height:60mm	Fe 1.2mm dia. (Reference value: SUS wire 0.2mm dia X 2mm)		
Conveyance speed		from 10 to 60m per min. (adjustable)		
Conveyor length / Pass line height		1,010mm/750mm±50mm		1,310mm/750mm±50mm
Power source		AC100V±10% 50/60Hz or required		

High grade type

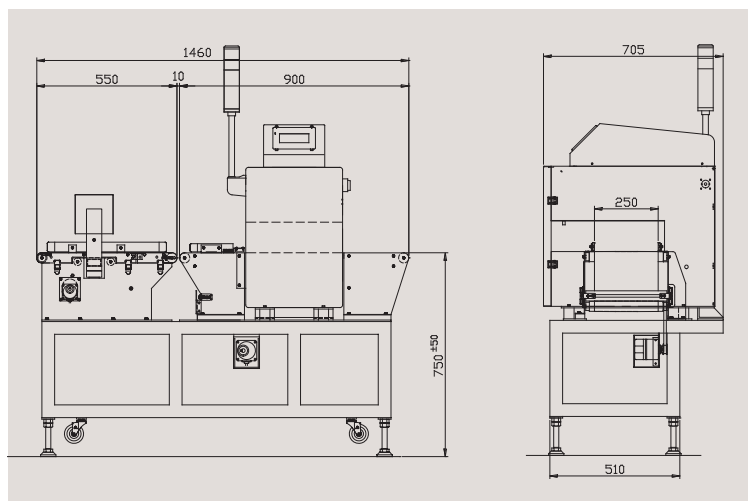

NT3R-K4B



Model		NT3R-J6B	NT3R-K4B	NT3R-L2B
Belt width		150mm	250mm	350mm
Sensitivity	effective height:100mm	Fe 0.8mm dia. (Reference value: SUS wire 0.2mm dia X 2mm)		
	effective height:120mm	Fe 1.2mm dia. (Reference value: SUS wire 0.2mm dia X 2mm)		
Conveyance speed		from 10 to 60m per min. (adjustable)		
Conveyor length / Pass line height		1,460mm/750mm±50mm		1,760mm/750mm±50mm
Power source		AC100V±10% 50/60Hz or required		