


Pipe type


NT3P

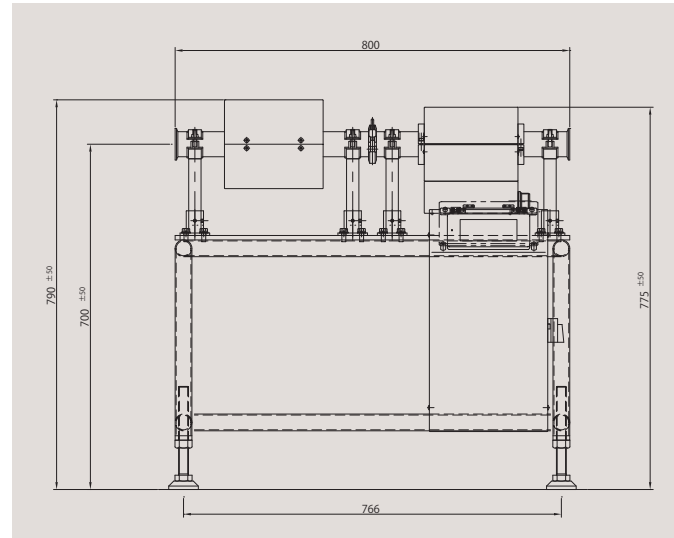

Model	NT3P-1.5S	NT3P-2.0S
Pipe size	1.5S	2.0S
Sensitivity	Fe 0.5mm dia. (Reference value: SUS wire 0.2mm dia X 2mm)	
Capable speed	from 10 to 100m per min.	
Tempera ture	Product -10 ~ 80C°	Ambient temperature 0 ~ 40C°
Power source	AC100V ~ 240V ±10% 50/60Hz or required	

Chute type

NT2R-JS2

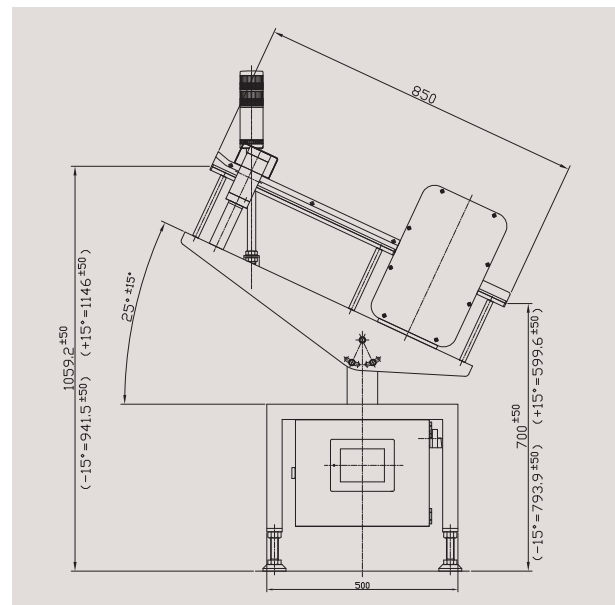

Model	NT2R-JS2	
Effective width	120mm	
Sensitivity	effective hight:30mm	Fe 0.6mm dia. (Reference value: SUS wire 0.2mm dia X 2mm)
Capable speed	from 10 to 100m per min.	
Power source	AC100V ~ 240V ±10% 50/60Hz or required	